



Single Swing

Manual Cold Storage Door

PRODUCT DATA

Model EFD-SSB/SHS

The FRANK Manual Single Swing Door is used for personnel and hand truck traffic in buildings where environmental control is necessary. Suitable for coolers or freezers and for interior or exterior use. Custom made for new or replacement applications and available with an array of hardware choices.



Standard Features

Panel

- No Wood Construction
- 24 Gauge Metal Skins
- .040 Embossed Aluminum Skins
- Robust Full Perimeter Polymer Door Frame
- U.L. Listed

Insulation

- Minimum of 4" Thick, R32 Foamed In Place Polyurethane
- Panel Mounted Gasket

Hardware

- Bullet Hinge
- Traditional 10" Hinge
- Heavy Duty Strap Hinge
- Single Point Latch
- Padlocking Provision
- Integrated Inside Release

Side Casings and Header

- Insulated Extruded Aluminum
- Sweep Bottom or High Sill

Freezer Doors

- Three Sided Heat in the Frame
- Heat Radiating Bottom Door Pan
- Protected Heat Chase
- U.L. Listed Heater

Options

Panel

- Other Metal Finishes and Colors Available
- Molded Fiberglass Door Panels Available
- Diamond Tread or Stainless Steel Kick Plates
- Three Pane Heated View Window
- 6" Thick Panels Available

Hardware

- Assist Wheel
- Bump Open Bar
- Door Closer
- Multi Point Latch
- Panic Bar
- Rotary Compression Latch
- Spring Loaded Hinges
- Keyed Latch

Side Casings and Header

- Jamb Caps
- Return Jambs
- Trackport
- Rain Hood
- Extruded Aluminum Back Up Header and Casings
- Other Metal Finishes and Colors Available

Food Service Packages

- Food Service Package 1
- Food Service Package 2
- Food Service Package 3
- See Reverse Side for Details

As the Frank Door Company constantly strives to build the highest quality products for performance and value, the design, specifications, materials, features and prices are subject to change without notice.

The New **American Standard** in Cold Storage Doors

Frank Door Company 413 Howard Blvd., Newport, North Carolina USA 28570

www.frankdoor.com Toll Free (888)833-3667 Phone (252)223-1112 Fax (252)223-1116



Single Swing

Manual Cold Storage Door

Food Service Packages

FS1:

- Food Service Latch
- Magnetic Gasket
- Top Door Closer
- Standard Hinges

FS2:


- Food Service Latch
- Magnetic Gasket
- Top Door Closer
- Spring Loaded Hinges

FS3:

- Rotary Compression Latch
- Magnetic Gasket
- Top Door Closer
- Spring-loaded Bullet Hinges

Trackport:

- Available for meat rail application
- Standard trackport is 8" wide and 12" high from top of the finished opening

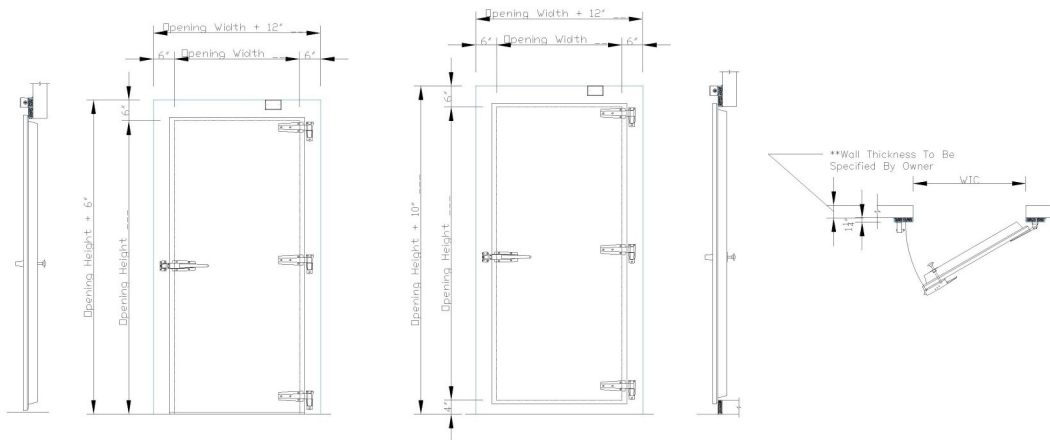

Downloadable drawings and CSI formatted specifications are available at www.frankdoor.com

Single Swing Manual Cold Storage Door

Division 13
Section 13010

Cold Storage Doors

Section 08 38 00

Part 1 - General

1.01 Scope

Work required under this section shall include the furnishing of all labor, materials, tools and equipment necessary to complete all work as detailed on the drawings and/or as specified herein.

1.02 Product

Supply, where indicated on the plans, a Frank Door Model EFD-SSB/SHS (single swing manual cold storage door). Door panel shall be constructed of an extruded polymer profile with a choice of metal skins. Door panel shall contain at least 4" of foamed-in-place polyurethane insulation (R32). Insulated wall casings and header shall be aircraft grade aluminum extrusions. Gasketing shall be panel mounted compression gasket and bottom sweep. All hardware and mechanisms shall be corrosion resistant materials. No organics such as wood or wood composites shall be used in the door panel, casings or header. Doors shall be UL listed and built to NSF standards.

1.03 Substitutions

This specification is written with Frank Door Company Model EFD-SSB/SHS as the basis of acceptable materials, construction and performance. No substitutions will be considered unless written request for approval is received in the architect's office at least 14 days prior to the release of the bids.

1.04 Submittals

In compliance with the specification requirements, submit detailed shop drawings for each door showing in clear detail all mounting requirements and accessories.

1.05 Quality Assurance

Doors shall be installed in accordance with the architect's plans and specifications along with the door manufacturer's written installation instructions, drawings and recommendations. Doors shall carry a 5 year limited warranty for the door panel, door frame, trim, vertical casings and header and a 2 year limited warranty on all other Frank Door Company manufactured components with the exception of typical wear components. Frank Door Company also warrants all products or component parts not manufactured by Frank Door Company to the same extent that they were warranted by the original manufacturer to the Frank Door Company.

Part 2 - Product

2.01 Material

Casings/Header

Extruded aluminum profiles with insulated polystyrene inserts. (Matching back up headers and casings are optional. Return jambs are optional.) No organics such as wood or wood composites shall be accepted. All sweep bottom freezer doors shall be equipped with a heater cable in the three sided casing frames. All high sill freezer doors shall be equipped with a full perimeter heater cable in the casing frames.

Door Panel

The door panel shall be constructed of an extruded polymer profile with mitered corners and clad with two USDA approved 24 gauge steel or .040 aluminum face sheets (Smooth white and stainless steel face steel face sheets are optional) to fully enclose the frame. Backup blocking is used at all hinge, latch, handle, closer and lock attachment points. The panel is foamed-in-place with at least 4" of polyurethane insulation (R32). Gasketing shall be panel mounted compression gasket and a bottom sweep. The metal panel skins are isolated by the polymer frame creating a full perimeter front to back thermal break. (Optional triple pane view window shall be sealed, heated and constructed with heat reflective tempered safety glass and metal frame. Aluminum diamond plate and stainless steel kick plates are optional). No organics such as wood or wood composites shall be used for the door panel structure or blocking. All sweep bottom freezer doors shall be equipped with a door mounted threshold heat radiating pan.

Hinges and Door Hardware

Hinges shall be cam-lift. (Bullet style, tamper resistant cam lift hinges are optional. Strap hinges are optional. Door closer is optional. Rotary compression latch is optional. Keyed lock is optional. Stainless steel hardware is optional). Latches shall be a single point latch with inside safety release and padlocking provision. All doors shall have integrated emergency release hardware on opposite side. All hardware and mechanisms shall be corrosion resistant.

Part 3 - Execution

3.01 Installation

Doors shall be mounted in full accord with the door manufacturer's installation instructions and contract documents. When mounting the door casings, the mounting surfaces shall be set true and level, be shimmed and caulked to assure tightness and fit, securely lagged or through bolted to the wall structure. After the doors are hung, they shall be checked for mechanical operation and adjusted to ensure a tight and uniform perimeter gasket seal. Connection of any panel or window heating is the responsibility of the electrical contractor.

3.02 Product Delivery, Storage and Handling

Each cold storage door shall be securely crated as to protect the door from damage during shipment and handling. Door identification number shall be clearly marked on the outside of each crate.

3.03 Cleaning and Adjustment

Clean all doors of excess sealant, grease, stains, fingerprints and construction dust prior to final inspection to the satisfaction of the architect/owner. Adjust all doors for smooth, proper operating condition, including proper sealing and lubrication, prior to turnover of facility to owner.