

DOOR COMPANY

EFD-SSB/SHS

The FRANK DOOR Manual Single Swing Door is used for personnel and hand truck traffic in buildings where environmental control is necessary. Suitable for coolers or freezers, interior or exterior. Available as **sweep bottom** or **high sill** (for sloped or uneven floors). Custom made for new or replacement applications.

Standard Features

Finish

- 24 gauge metal
- 040 embossed aluminum

No Wood Construction

Insulation

- Foamed in place polyurethane
- R value 8 per inch

Panel Mounted Gasket

3 Hinges per Door – Choose from:

- **"Bullet Hinge"**
 - Edge-mounted sanitary design
 - Non-corrosive powder coated zinc
 - Cam lift, adjustable in three axes
 - No stress points
 - Tamper resistant
 - Suitable for any door size
 - Optional spring kit or door blade available
- **Traditional Hinge**
 - Cam lift
 - Self-lubricating nylon cam delivers smooth & trouble free operation on doors under 42"
- **Heavy Duty Hinge**
 - Reversible strap hinge
 - Designed for extra large swing doors 42" and over

Latch/Strike

- Single point fastener with inside safety release
- Padlocking provision

Inside Release

- Solid brass button knob for extreme durability
- Stainless steel push rod, shaft and mounting place
- Available as option with recessed design

Insulated Extruded Aluminum Casing Frame

- Available in white or anodized gray
- Sweep bottom or high sill application
- Eliminates potential for swelling, warping or bacterial contamination

120 Volt Heaters

- For all freezer applications
- UL listed
- Easy access
- Door panel includes heat radiating pan, eliminating need for floor mounted heat threshold
- Heated casings standard for all freezer applications.



Options

- Assist Wheel
- Bump Open Bar
- Door Closer
- Extruded Aluminum Back-Up Header and Casings
- Other Finishes Available
- Jamb Caps
- Keyed Latch
- Kickplate
- Multi Point Latch
- Panic Bar
- Return Jamb
- Rotary Compression Latch
- Spring Loaded Hinges
- View Window

MANUAL SINGLE SWING DOOR



Options continued

FOOD SERVICE PACKAGES

FS1

- Food Service Latch
- Magnetic Gasket
- Top Door Closer
- Standard Hinges

FS2


- Food Service Latch
- Magnetic Gasket
- Top Door Closer
- Spring-loaded Hinges

FS3

- Rotary Compression Latch
- Magnetic Gasket
- Top Door Closer
- Spring-loaded Bullet Hinges

TRACKPORT

- Available for meat rail application
- Standard trackport is 8" wide and 12" high from top of finished opening
- Casing Frame is aluminum extruded

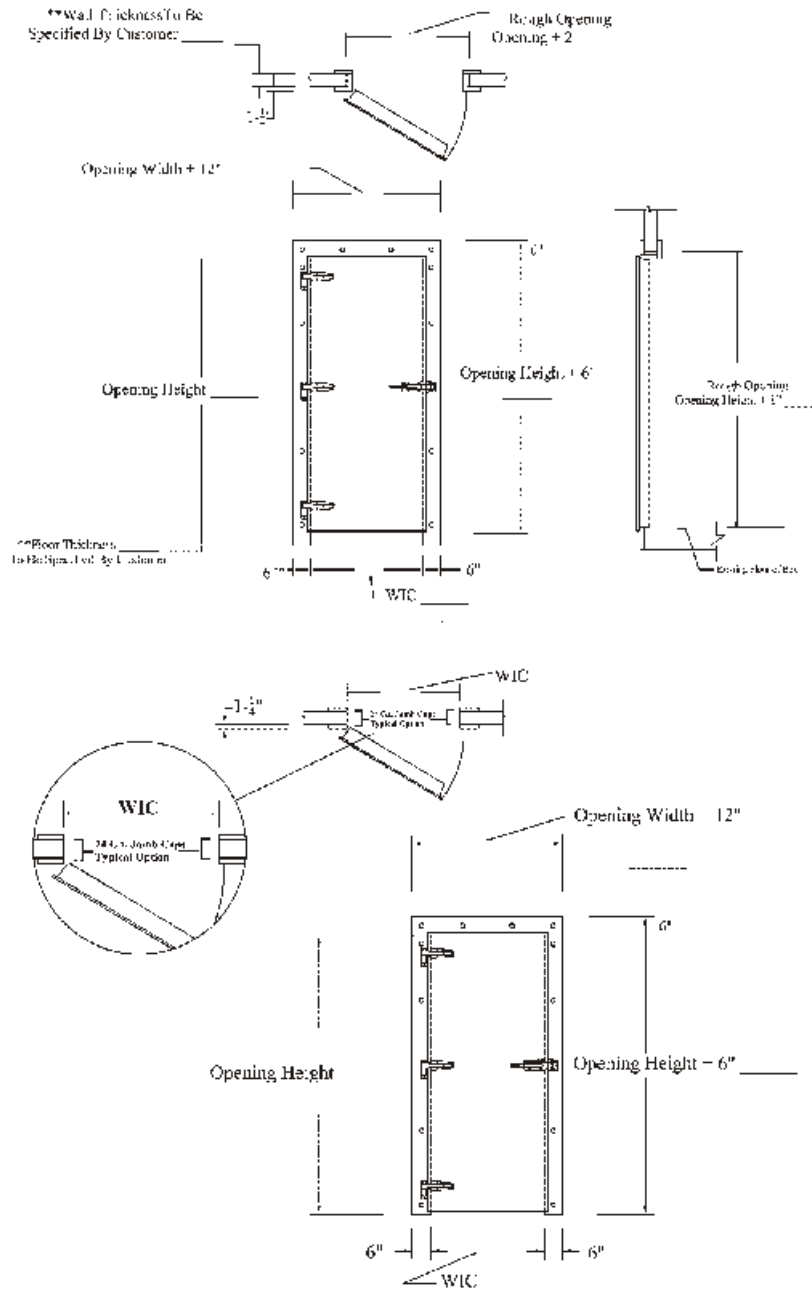

DISCLAIMER: As we are always striving to improve our products, FRANK DOOR Company reserves the right to alter specifications and design without incurring obligation.

America's "New Standard" for Cold Storage Doors