




Job Number \_\_\_\_\_  
 Job Name \_\_\_\_\_  
 Date \_\_\_\_/\_\_\_\_/\_\_\_\_  
 Quantity \_\_\_\_\_  
 Signature \_\_\_\_\_  
 On Site Date \_\_\_\_\_

## Electric Vertical Left Side Counterweight & Wicket Door

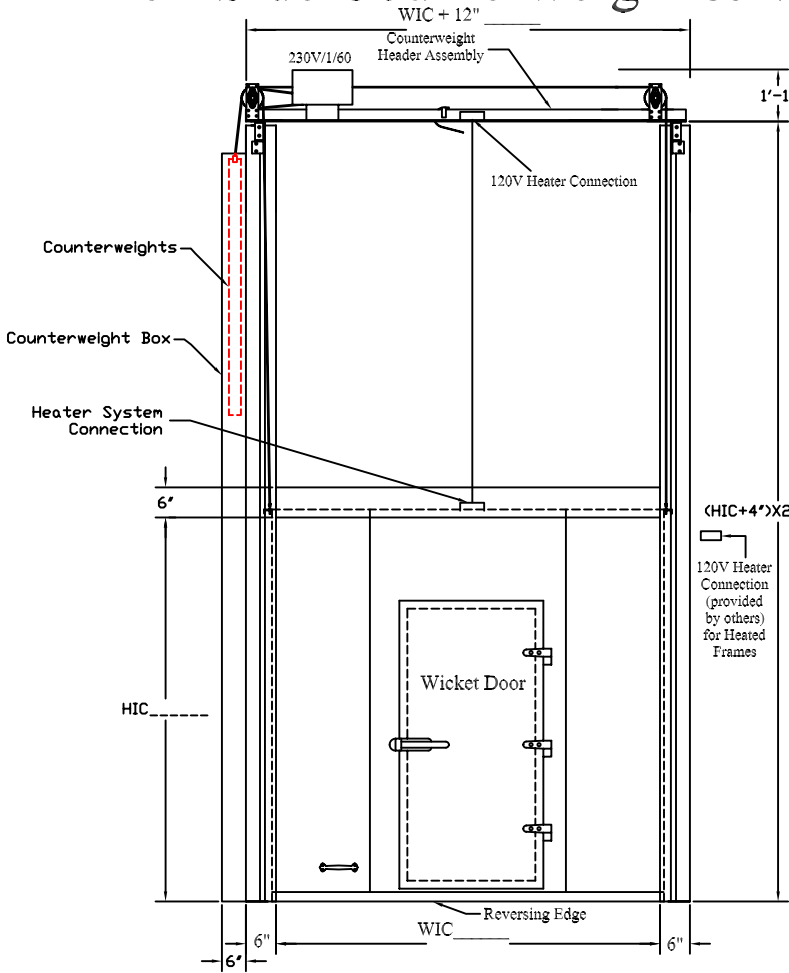

**WICKET DOOR**

- Hardware:**  
 Hinges ( ) \_\_\_\_\_  
 Latch/Strike \_\_\_\_\_ Cyl. Lock \_\_\_\_\_  
 Inside Release \_\_\_\_\_ Close \_\_\_\_\_  
 Panic Hardware \_\_\_\_\_  
 Kick Plates:  
     Exterior: Alum \_\_\_\_\_ SS \_\_\_\_\_  
     Interior: Alum \_\_\_\_\_ SS \_\_\_\_\_  
 View Window:  
     Non-Heated \_\_\_\_\_ Heated \_\_\_\_\_  
     14 X 14 \_\_\_\_\_ 14 X 24 \_\_\_\_\_

**SPECIAL OPTIONS:**

- Backup Header & Casings \_\_\_\_\_  
 Return Jamb \_\_\_\_\_ Jamb Caps \_\_\_\_\_  
 Wall Thickness \_\_\_\_\_  
 Kick Plates:  
     Exterior: Alum \_\_\_\_\_ SS \_\_\_\_\_  
     Interior: Alum \_\_\_\_\_ SS \_\_\_\_\_  
 View Window:  
     Non-Heated \_\_\_\_\_ Heated \_\_\_\_\_  
     14 X 14 \_\_\_\_\_ 14 X 24 \_\_\_\_\_

**ELECTRIC OPERATORS:**

- Power Source Voltage \_\_\_\_\_  
 Power Requirement: 230v/1/60  
 Control Stations:  
     (2 Pull Cords Std) Add. Cords: (Qty) \_\_\_\_\_  
     2-Button Switch: (Qty) \_\_\_\_\_  
 (Reversing Edge Std) Photocell: \_\_\_\_\_ (Qty) \_\_\_\_\_  
 Remote Control \_\_\_\_\_ Add. Remotes: (Qty) \_\_\_\_\_  
 Motion Detector \_\_\_\_\_ Loop Detector \_\_\_\_\_

SPECIAL NOTES/INSTRUCTIONS: \_\_\_\_\_

**NET OPENING:** Width \_\_\_\_\_ Height \_\_\_\_\_

**FEATURES:**

- Cooler \_\_\_\_\_ Freezer \_\_\_\_\_  
 Temperature:  
     Interior \_\_\_\_\_ °F  
     Exterior \_\_\_\_\_ °F  
 Door Panel Thickness: 4" \_\_\_\_\_ 6" \_\_\_\_\_

**FINISH:**

- Exterior:**  
 Smooth: Galv \_\_\_\_\_ White \_\_\_\_\_ SS \_\_\_\_\_  
 Stucco: Galvalume \_\_\_\_\_ White \_\_\_\_\_ Alum \_\_\_\_\_  
 Other: \_\_\_\_\_  
**Interior:**  
 Smooth: Galv \_\_\_\_\_ White \_\_\_\_\_ SS \_\_\_\_\_  
 Stucco: Galvalume \_\_\_\_\_ White \_\_\_\_\_ Alum \_\_\_\_\_  
 Other: \_\_\_\_\_