




Job Number \_\_\_\_\_  
 Job Name \_\_\_\_\_  
 Date \_\_\_\_/\_\_\_\_/\_\_\_\_  
 Quantity \_\_\_\_\_  
 Serial Number \_\_\_\_\_

# Left Hinge Extruded Aluminum Casing Frame

With 3 Sided Return Jamb, Sweep Bottom & Backup Casings

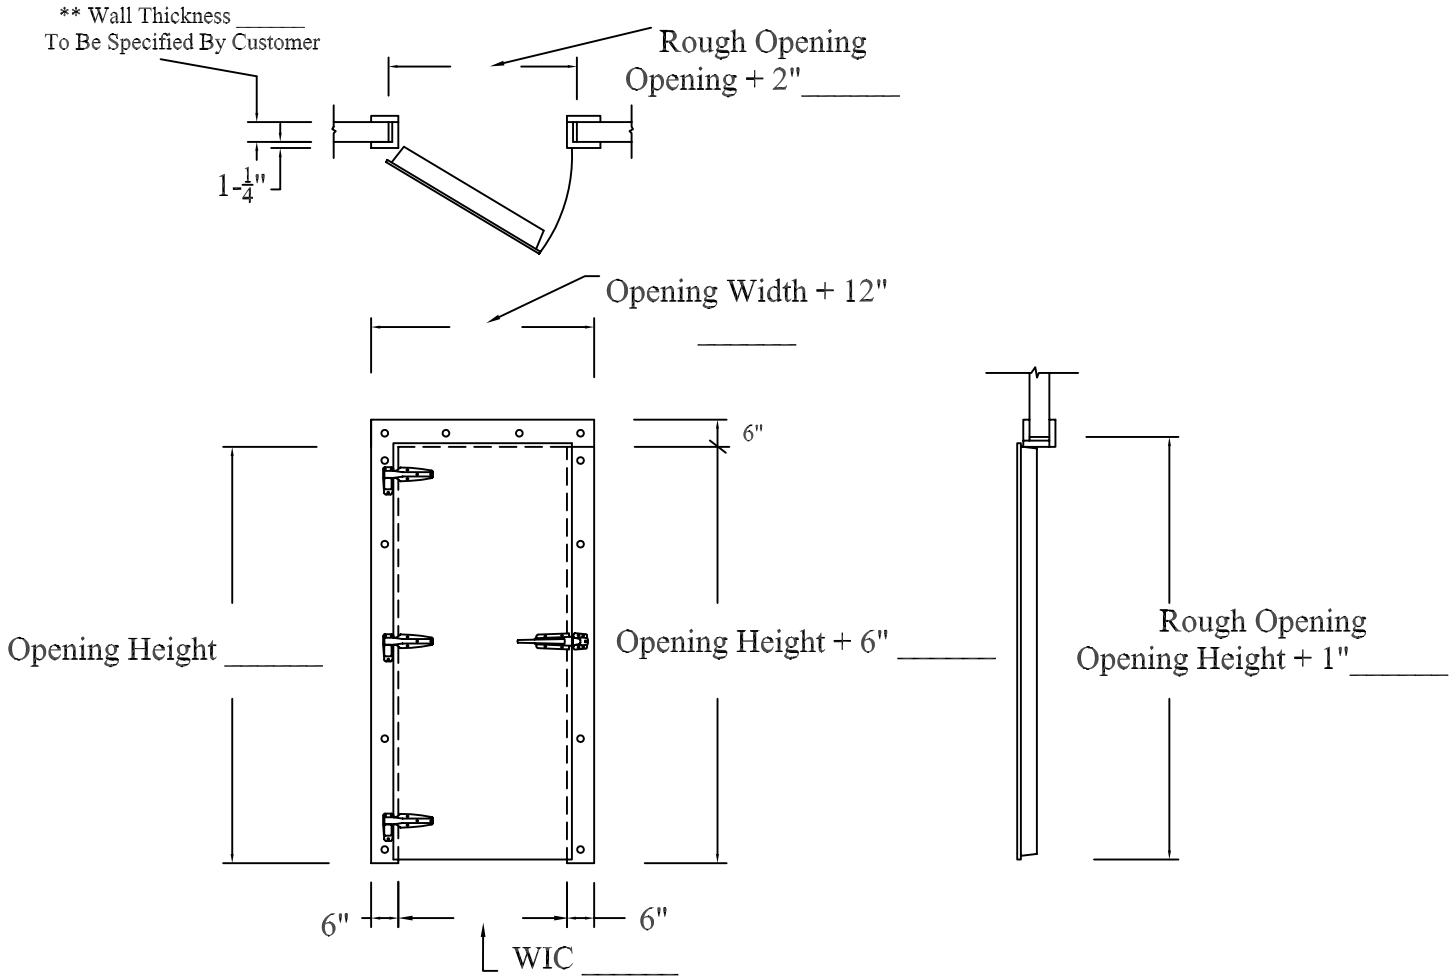

**ROUGH OPENING:** Width \_\_\_\_\_ Height \_\_\_\_\_

**NET OPENING:** Width \_\_\_\_\_ Height \_\_\_\_\_

**FEATURES:**

- Cooler \_\_\_\_\_ Freezer \_\_\_\_\_ \*
- Temperature \_\_\_\_\_ °F
- Standard Gasket \_\_\_\_\_
- \*Heat Cable: (3) Sided in Frame & Door Bottom W/Sweep

**FINISH:**

- Exterior:**
  - Smooth: Galv \_\_\_\_\_ White \_\_\_\_\_ SS \_\_\_\_\_
  - Stucco: Galvalume \_\_\_\_\_ White \_\_\_\_\_ Alum \_\_\_\_\_
  - Other: \_\_\_\_\_
- Interior:**
  - Smooth: Galv \_\_\_\_\_ White \_\_\_\_\_ SS \_\_\_\_\_
  - Stucco: Galvalume \_\_\_\_\_ White \_\_\_\_\_ Alum \_\_\_\_\_
  - Other: \_\_\_\_\_

**HARDWARE:**

- Hinges ( ) \_\_\_\_\_
- Latch/Strike \_\_\_\_\_ Cyl. Lock \_\_\_\_\_
- Inside Release \_\_\_\_\_ Closer \_\_\_\_\_
- Panic Hardware \_\_\_\_\_

**SPECIAL OPTIONS:**

- Backup Header & Casings \_\_\_\_\_
- Return Jamb \_\_\_\_\_ Wall Thickness \_\_\_\_\_ \*\*
- Kick Plates:
  - Exterior: Alum \_\_\_\_\_ SS \_\_\_\_\_
  - Interior: Alum \_\_\_\_\_ SS \_\_\_\_\_
- View Window:
  - Non-Heated \_\_\_\_\_ Heated \_\_\_\_\_
  - 14 X 14 \_\_\_\_\_ 14 X 24 \_\_\_\_\_

**SPECIAL NOTES/INSTRUCTIONS:** \_\_\_\_\_

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_